



BS EN12094-1  
KM 96761



Model No. K11031M2

## Extinguishant Control Panel

Sigma XT is a new generation extinguishant releasing panel which is fully compliant with European standard BS EN12094-1.

(Fixed firefighting systems – components for gas extinguishing systems).

The simple, programmable configuration options and easy to install construction make Sigma XT panels the ideal choice for small to medium sized systems using all extinguishant agents.

## Programmable Functions

### Access Level 2

- ☐ Test Zones 1 to 3
- ☐ Disable Zones 1 to 3
- ☐ Disable 1st Stage Alarms
- ☐ Disable Pre-activated 1st Stage Relay
- ☐ Disable Pre-activated 2nd Stage Relay
- ☐ Disable Extract Fan Output
- ☐ Disable Manual Release Input
- ☐ Disable Extinguishant Sub System
- ☐ Activate Extract Fan Output
- ☐ Activate Alarm Delays

### Access Level 3

- ☐ Sounder Delay
- ☐ Coincidence Detection
- ☐ Disable Panel Features
- ☐ Zone Alarm Delays (Detectors)
- ☐ Zone Alarm Delay (Call Points)
- ☐ Configure Zone for I.S Barrier Use
- ☐ Zone Short Circuit Alarm
- ☐ Zone Non Latching
- ☐ Zone Inputs Delay
- ☐ Extinguishant Release Time Delay
- ☐ Extinguishant Release Duration Timer
- ☐ Extinguishant Reset Delay Timer

## Features

- ☐ Complies with EN12094-1
- ☐ Three detection zones as standard
- ☐ Any single zone or any combinations of zones can be configured to release
- ☐ Configurable first stage sounder delays
- ☐ Configurable detection delays
- ☐ Zero time delay upon manual release option
- ☐ Compatible with I.S. barriers
- ☐ Non-latching zone input option to receive signals from other systems such as aspirating equipment
- ☐ Configurable extinguishant delays up to 60 seconds in 5 second steps
- ☐ Configurable extinguishant duration up to 5 minutes in 5 second steps
- ☐ Countdown timer shows time remaining until release
- ☐ Supports up to seven, four wire status indicators
- ☐ Built in Extract Fan control



## Product Overview

- ☐ Designed and manufactured to the highest standards in a quality controlled environment and with European EN12094-1 approvals, the Sigma XT extinguishant releasing panel offers outstanding value and performance for all small to medium fixed firefighting installations.
- ☐ With three detection zones as standard, extinguishant release can be configured to activate from any combination of detection zone inputs to a low (among other combinations) any two from three type activations such as would be required for detection in ceiling void, room and floor void applications.
- ☐ The extensive configuration options of the Sigma XT allow the functionality of the system to be extensively modified while still complying with the requirements of the controlling standard for the equipment (EN12094-1).
- ☐ The panel contains a large LED display to enable easy configuration and control which also displays the time remaining until extinguishant release for added user safety.
- ☐ The countdown timer is duplicated on up to seven remote status units to provide local indication of the extinguishant system status.
- ☐ With all of the electronics mounted on a single, easily removable, steel plate Sigma XT panels are both robust and easy to install.
- ☐ Sigma XT is supplied in an enclosure that matches the design and colour of the Sigma CP range.



# Specifications

DS40.03.2006

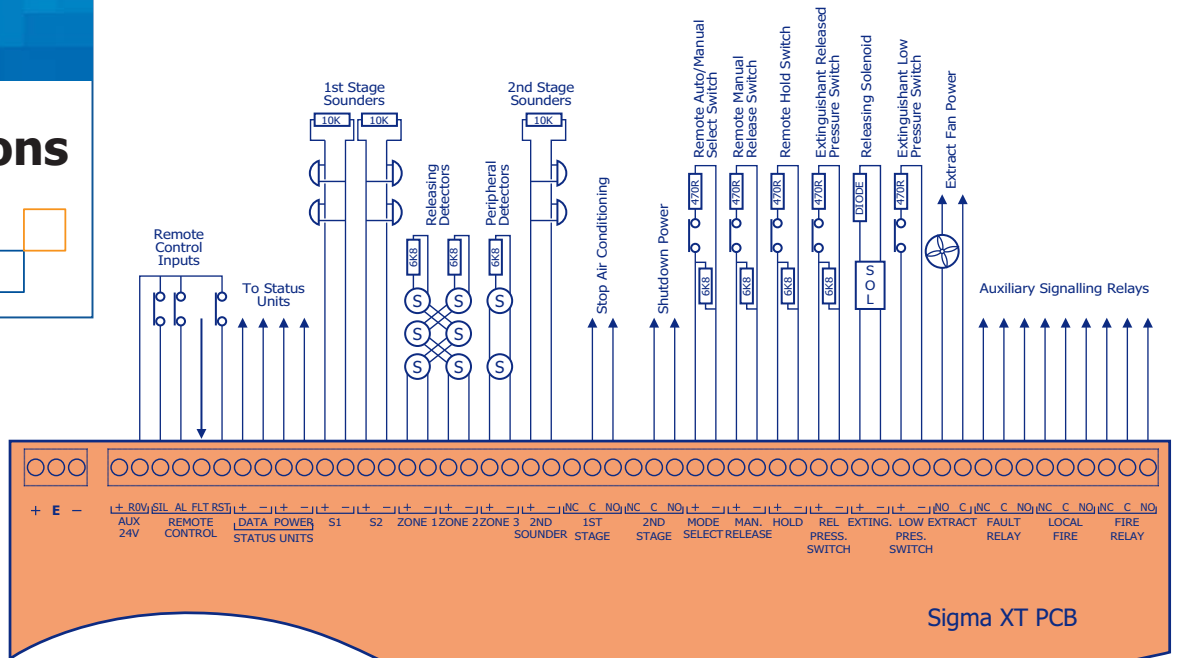

Sigma XT PCB

## Panels

## Technical

Product Code	Description	Size (mm)
<b>K11031M2</b>	Surface mounting panel	385 x 310 x 90
<b>K11031F2</b>	Flush mounting panel *	415 x 315 x 86

### Compatible Status & Hold Off Units

<b>K911000M8</b>	6 lamp unit	(surface)
<b>K911000F8</b>	6 lamp unit	(flush)
<b>K911100M8</b>	6 lamp unit c/w mode select	(surface)
<b>K911100F8</b>	6 lamp unit c/w mode select	(flush)
<b>K911110M8</b>	6 lamp unit c/w mode select and manual release	(surface)
<b>K911110F8</b>	6 lamp unit c/w mode select and manual release	(flush)
<b>K911113M8</b>	10 lamp unit c/w mode select and manual release	(surface)
<b>K911113F8</b>	10 lamp unit c/w mode select and manual release	(flush)
<b>K91000M10</b>	Extinguishant hold off switch	(surface)
<b>W911000W8</b>	IP65 - 6 lamp unit	(surface)
<b>W911100W8</b>	IP65 - 6 lamp unit c/w mode select	(surface)
<b>W911110W8</b>	IP65 - 6 lamp unit c/w mode select and manual release	(surface)
<b>W911113W8</b>	IP65 - 10 lamp unit c/w mode select and manual release	(surface)

\* Flush version not Kitemark Approved

Mains supply	- 230V AC +10%/-15% (100 Watts maximum)
Mains supply fuse	- 1.6 Amp (F1.6A L250V)
Power supply rating	- 3 Amps total including battery charge 28V +/- 2V
Maximum ripple current	- 200 millivolts
Battery type (Yuasa NP)	- Two 12 Volt 7Ah sealed lead acid in series
Battery charge voltage	- 27.6VDC nominal (temperature compensated)
Battery charge current	- 0.7A maximum
Battery fuse	- 20mm, 3.15A glass
Maximum current draw from batteries	- 3 Amps
Quiescent current of panel in mains fail	- 0.095A
R0V output	- Fused at 500mA with electronic fuse
Sounder outputs	- 24V Fused at 500mA with electronic fuse
Fault relay contact rating	- 30VDC 1A Amp maximum
Fire relay contact rating	- 30VDC 1A Amp maximum
Local fire relay contact rating	- 30VDC 1A Amp maximum
First stage contact rating	- 30VDC 1A Amp maximum
Second stage contact rating	- 30VDC 1A Amp maximum
Extract contact rating	- 30VDC 1A Amp maximum
Zone quiescent current	- 2mA maximum
Terminal capacity	- 0.5mm <sup>2</sup> to 2.5mm <sup>2</sup> solid or stranded wire
Number of detectors per zone	- Dependent on type (maximum 32)
Number of sounders per circuit	- Dependent on type (max. 0.5A per sounder circuit)
Detection circuit end of line	- 6K8 5% 1/2 Watt resistor
Monitored input end of line	- 6K8 5% 1/2 Watt resistor
Sounder circuit end of line	- 10K 5% 1/4 Watt resistor
Extinguishant output end of line	- 1N4004 Diode
No. of detection circuits	- 3
No. of sounder circuits	- 2 x 1st Stage, 1 x 2nd Stage
Extinguishant release output	- Fused at 1 Amp
Extinguishant release delay	- Adjustable 0 to 60 seconds (in 5 second steps)
Extinguishant release duration	- Adjustable 60 to 300 seconds (in 5 second steps)
SIL, AL, FLT, RST inputs	- Switched -ve, max resistance 100 Ohms
Zone normal threshold	- 8K ohms to 1K ohm
Detector alarm threshold	- 999 ohms to 400 ohms
Call point alarm threshold	- 399 ohms to 100 ohms
Short circuit threshold	- 99 ohms to 0 ohms
Head removal condition	- 15.5 to 17.5 volts
Cabling	- FP200 or equivalent
Monitored inputs normal threshold	- 8K ohms to 1K ohm
Monitored inputs alarm threshold	- 999 ohms to 100 ohms
Monitored inputs Short circuit threshold	- 99 ohms to 0 ohms
Status unit/Ancillary board connection	- Two wire RS485 connection
Status unit power output	- Fused at 500mA with electronic fuse

Extinguishant



Certificate No. FM 32987  
BS EN ISO 9001: 2000



Certificate No. 360  
BS EN ISO 9001: 2000